0631-0200 SRT
0631-0500 SRT
0631-1000 SRT

	BALL NUT									SCREW				BALL NUT ACCESSORIES		BALL NUT DIMENSIONS
	Ball Nut Number	Helix	Max. Adj. Preload (lb)	Dynamic Load (lb)	Static Load (lb)	Balls per Circuit/Nut	Nominal Ball Dia. (in)	Nut Wt. (lb)	Torque to Raise 1 lb (in·lb)	Ball Circle Dia. (in)	Lead (in)	Root Dia. (in)	Screw Wt. (lb/ft)	Flange	Wiper	
0631-0200 SRT single start 0.631 Ball Circle Dia. (in) 0.200 Lead (in)	SBN7645	RHSS	0	140	1,149	68/68	0.125	0.27	0.035	0.631	0.200	0.500	0.82	FLG7570SS	—	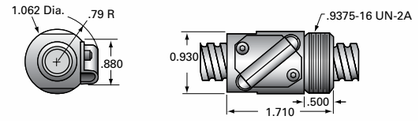
	SBN10325 SBN10583*	RH	0	815	6,384	68/68	0.125	0.27	0.035	0.631	0.200	0.500	0.82	FLG7570	WKB10407	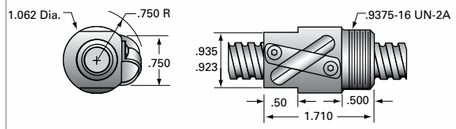
	SBN10409	LH	0	815	6,384	68/68	0.125	0.27	0.035	0.631	0.200	0.500	0.82	FLG7570	WKB10407	
	SBN10566	RH	0	712	5,250	60/60	0.125	0.27	0.035	0.631	0.200	0.500	0.82	FLG7570	—	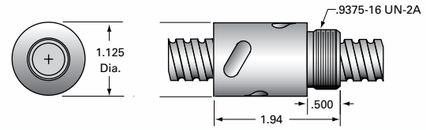
	SBN10264	LH	0	712	5,250	60/60	0.125	0.27	0.035	0.631	0.200	0.500	0.82	FLG7570	—	
	SEL10408	RH	233	815	6,384	68/136	0.125	0.65	0.035	0.631	0.200	0.500	0.82	FLG7570	WKB10407	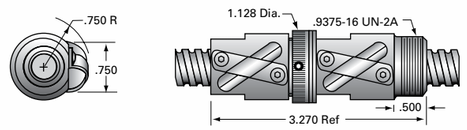
	SEL10410	LH	233	815	6,384	68/136	0.125	0.65	0.035	0.631	0.200	0.500	0.82	FLG7570	WKB10407	
0631-0500 SRT double start 0.631 Ball Circle Dia. (in) 0.500 Lead (in)	SBN10113	RH	0	960	5,565	37/74	0.125	0.27	0.088	0.631	0.500	0.500	0.82	FLG7570	—	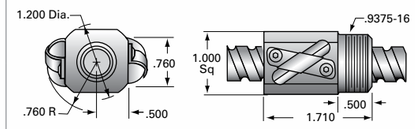
	SEL10182	RH	288	960	5,565	37/148	0.125	0.65	0.088	0.631	0.500	0.500	0.82	FLG7570	—	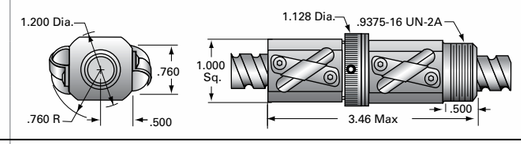
0631-1000 SRT four start 0.631 Ball Circle Dia. (in) 1.000 Lead (in)	SBN10392	RH	0	620	2,580	21/42	0.125	0.28	0.177	0.631	1.000	0.500	0.82	FLG7570	—	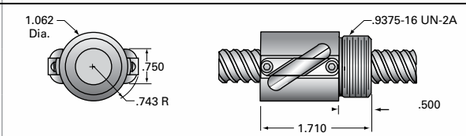

* Integral safety thread. See page 80.

STANDARD SCREW LENGTHS (Custom cut lengths available up to 12')

	0631-0200 RHSS	0631-0200 RH	0631-0200 LH	0631-0500 RH	0631-1000 RH
2 ft	SRT5359	SRT9392	SRT9562	SRT6524	SRT6124
4 ft	SRT5648	SRT9987	SRT5092	SRT6548	SRT6148
6 ft	SRT5378	SRT7540	SRT7541	SRT6572	SRT6172

For longer lengths, contact Customer Service.

FLG7570 - Flange



WKB10407 - 2 wipers/1 retainer



screw assemblies p. 93
lubricants p. 86
twin-lead screws p. 94
end machining p. 204
EZZE-MOUNT™ bearing supports p. 202
engineering tools p. 82

2D/3D CAD ONLINE
nookindustries.com

The specifications and data in this publication are believed to be accurate and reliable. However, it is the responsibility of the product user to determine the suitability of Nook Industries products for a specific application. While defective products will be replaced without charge if promptly returned, no liability is assumed beyond such replacement.